



CATALOG

EDITION 2019 - 2020



FR WORKWEAR.....	06
HEAD AND FACE PROTECTION	10
EYE PROTECTION	16
HEARING PROTECTION.....	22
RESPIRATORY PROTECTION.....	26
HAND PROTECTION.....	30
BODY PROTECTION - WORKWEAR...	36
FOOT PROTECTION.....	44
FALL PROTECTION.....	54
RESCUE AND EVACUATION.....	58





Onshore Technical Supplies

FR WORKWEAR

FR WORKWEAR

The Rigman Tecasafe Plus® is made using the highly acclaimed Tencate TecasafePlus collection of inherently heat- and flame-resistant fabrics. These range of products offer excellent protection against flash fires and electric arcs: while at the same time remaining soft and breathable with superior moisture management properties – thus making a user feel cooler, dryer and more comfortable. Since the fabric is available in 200gsm weight, it becomes the best choice to be worn in hot and humid conditions which are more in the MENA region.

CERTIFIED BY THE LEADERS

The Rigman Tencate Tecasafe Plus fabric has been tested and certified under both American and European standards. Apart from this, the finished garments have been tested and certified by BS EN ISO 17025 accredited lab and testing authorities to ensure the compliance of garment. Tencate Tecasafe plus fabric has undergone the instrumented mannequin test as per ISO 13506 test method. The Tencate Tecasafe plus fabric has been certified under the following certification standards:

NFPA 2112 – American Standards for Protection against Industrial Flame and Heat Hazards

EN 11612 – European Standards for Protection against Industrial Flame and Heat Hazards

EN 61482 – European Standards for Electric Arc

EN 1149-5 – European Standards for Anti – static

PRODUCT DETAILS	STANDARDS	SIZES	COLORS
Flame Retardant Coverall - Inherently Flame Resistant Material: 51/43/5/1% Ppan-fr / lyocell / para-aramid static - control - (200gsm)	NFPA 2112, EN ISO 11612 (Flame Resistant) EN 1149-5 (Anti-Static) EN 61482-1-2 (Electric Arc Flash) ATPV 7.1 Cal	EUR40 - 66 / Small-6XL	Royal Blue, Orange, Yellow, Red, Grey, Khakhi
Rigman F240AS 88/12, Flame Resistant Material: 87% Cotton, 12% Nylon, 1% Anti Static - (250gsm)	NFPA 2112 , EN ISO 11612 (Flame Resistant) EN 1149-5 (Anti-Static) EN 61482-1-2 (Electric Arc Flash) ATPV 9.2 Cal / 12 cal	EUR40 - 66 / Small-6XL	Royal Blue, Orange, Yellow, Red, Grey, Khakhi
Rigman Inherent Flame Resistant Material-215 gsm, Lenzing FR 65%, Aramid 33%, Carbon 2%	NFPA 2112 , EN ISO 11612 (Flame Resistant) EN 1149-5 (Anti-Static) EN 61482-1-2 (Electric Arc Flash) ATPV 14 Cal	EUR40 - 66 / Small-6XL	Royal Blue, Orange, Yellow, Red, Grey, Khakhi

RIGMAN INHERENT FR GARMENTS



EXCELLENT FR PROTECTION AGAINST FLASH FIRE AND ELECTRIC ARC



COOLER, DRYER AND MORE COMFORTABLE



HIGHLY DURABLE IN USE

BEST
FR FABRIC
IN TEST

MAKE SAFETY STYLISH


The Rigman Tencate Tecasafe Plus is available in different standard colours, design and size. The garment can be customized as per compliances under both European and American standards irrespective of genders, with ready trial pieces and availability of stock to ensure quick turnarounds. Rigman Tencate Tecasafe plus work wear are readily available through its distribution network in Europe, Middle East, Asian and African regions.



INHERENT FLAME RETARDANT COVERALL - RIGMAN TECASAFE PLUS

20

CERTIFIED: NFPA 2112, EN 11612, EN 1149-5, EN 61482




ZIP WITH FLAP

FLAME RETARDANT WINTER JACKETS

5

CERTIFIED: NFPA 2112, EN ISO 11612, EN 1149-5, EN 61482-1-2



ZIP WITH FLAP

PRODUCT DETAILS	STANDARDS	SIZES	COLORS
Flame Retardant Jacket- XL9200, 200gsm, Inherently Flame Resistant Material: 51/43/5/1% PPAN-FR/LYOCELL/PARA-ARAMID/STATIC-CONTROL	NFPA 2112 , EN ISO 11612 (Flame Resistant) EN 1149-5 (Anti-static) EN 61482-1-2 (Electric Arc Flash)	S - 5XL	Royal Blue, Orange, Yellow, Red, Grey, Khaki
Flame Retardant Jacket - Rigman F240 as 88/12, 240gsm, Flame Resistant Material. 87% Cotton, 12% Nylon, 1% Anti static	NFPA 2112 , EN ISO 11612 (Flame Resistant) EN 1149-5 (Anti-static) EN 61482-1-2 (Electric Arc Flash)	S - 5XL	Royal Blue, Orange, Yellow, Red, Grey, Khaki

HEAD AND FACE PROTECTION



HEAD AND FACE PROTECTION

HELMET -1701RSH

The Rigman helmet is a comfortable shell and suspension unit that offers desired industrial protection and is light in weight.

Available in type I, II class G,C & E

FEATURES

ABS shell, tough, lightweight, durable.

4-8 point Nylon Ratchet Suspension for shock absorbing and to suit all head sizes.



INDUSTRIAL APPLICATION

Construction & Infrastructure, Fabrication, Mining, Oil & Gas, Marine, Hardware, Process & Manufacturing



VENTILATION HELMET 81VHEL

- ABS Shell
- Lightweight and durable
- 6-Point adjustable webbing ratchet suspension for shock absorbing and to suit all head sizes

STANDARDS ANSI Z 89.1:2009,
EN397: 2012, CE, Type I, Class C



SAFETY HELMETS RSH

- ABS Shell
- Lightweight and durable
- 6-Point adjustable webbing Ratchet suspension for shock absorbing and to suit all head sizes

STANDARDS ANSI Z89.1 EN
397:2012, Type I, Class G, C & E




FULL BRIM HELMET

- ABS Shell
- Lightweight and durable
- Adjustable-Tightening wrack
- Excellent protection against impact and penetration

STANDARDS EN 397:2012
Type 1, Class G,C & E
ANSI Z89.1 Type I Type II



RATCHET

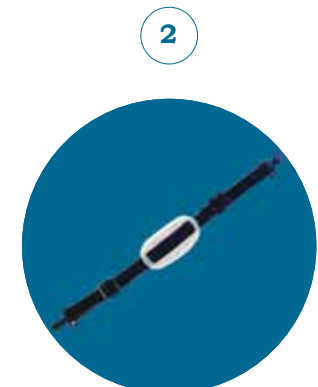

CHIN STRAP



HELMET WITH EAR MUFF - MAXFIT

Lightweight with soft foam-filled cushion providing a good seal for protection against harmful noise and adjustable reinforced head band.

STANDARDS ANSI S12.42,
ANSI Z89.1 & ANSI Z12.42
CE CN 397.292 & EN 352.3 2002



HELMET WITH WELDING FACE SHEILD

- Polypropylene welding screen
- Front window lift
(Protective fillers fits adapted and custody of glass)

STANDARDS EN 397, ANSI Z89.1
EN175F/CE



Ratchet



VISOR HEAD RC45

- Impact- resistant ABS Guard
- Ratchet suspension
- Lightweight and durable

STANDARDS CE,EN166 - B



FACE SHIELD VISOR WITH HEAD RC45

- Impact- resistant ABS Guard
- Ratchet suspension
- Lightweight and durable
- Clear Polycarbonate visor, 8" x 15.5" x 0.8mm, Aluminium bound

STANDARDS ANSI Z 87.1, EN 166 -B



FACE SHIELD VISOR WITH BRACKET FC 45

- Clear polycarbonate visor with Aluminium bound
- Lightweight and durable
- Provides protection against Chemical splash and light impact
- Size 8" x 15.5" x 0.8mm

STANDARDS ANSI Z 87.1, CE EN 166 - B

EYE PROTECTION



EYE PROTECTION

Rigman safety spectacles are to protect against hazardous substances like UV, IR, Flying fragments, Electric Arc and Chemical Splashes. All our eyewears are certified and in compliance with ANSI Z 87.1 and EN 166F.

INDUSTRIAL APPLICATION

Civil Construction, Fabrication, Oil & Gas, Marine, Mechanical Construction, Manufacturing.



2103



60



-  Anti-fog polycarbonate lens
-  High-grade resistant
-  Providing optimum protection and reducing glare
-  Withstands high temperatures and extreme conditions
-  Indirect Vented design
-  Comfort Foam

STANDARDS CE, EN 166F, ANSI Z87.1



SG 564



120



- Blue/ Yellow lens
- Co-injected temples
- Special Revo Anti-glare protection from UV rays
- Lightweight for all day comfortable fit

STANDARDS ANSI Z87.1, CE, EN 166F



SG 514V Anti Glare Lens



300



ANTI SCRATCH

- Indoor & Outdoor application
- Anti-scratch & Anti fog coated
- Temple with soft rubber pad
- UV Rays Protection

STANDARDS ANSI Z87.1, CE EN 166F



SG 519 AMBER



300



ANTI SCRATCH

- Amber lens for confined space or low light application
- Lightweight for an all day comfortable fit
- Maximum protection and optimal comfort package together with stylish design
- Anti-scratch
- UV Rays Protection
- Lens is made from UV385 Polycarbonate that filters out 99.9% of harmful UV radiation

STANDARDS ANSI Z87.1, CE EN 166F



SG 569-CLEAR/ GREY

- Clear/ Grey lens
- Ultra lightweight frame
- Ergonomic design
- Ratchet temple adjust

- Co-injected temples prevent slipping while providing soft fit
- Anti-fog
- Anti-scratch



300



ANTI SCRATCH



STANDARDS ANSI Z87.1, CE EN 166F

SG 579-CLEAR/ GREY

- Clear/ Grey Lens
- Lightweight for an all day comfortable fit
- Co-injected temple prevent slipping while providing a soft fit

- Ultra Lightweight Frame
- Ergonomic Design
- Anti-Fog
- Anti-Scratch



300



ANTI SCRATCH



STANDARDS ANSI Z87.1, CE EN 166F



SC 381-CLEAR/ GREY



- Clear/ Grey Lens
- Lightweight for an all day comfortable fit.
- Polycarbonate frame and temple
- Ultra Lightweight Frame
- Ergonomic Design
- Anti-Scratch

STANDARDS ANSI Z87.1, CE EN 166F



SC 417-CLEAR



- Clear/ Grey Lens
- Lightweight for an all day comfortable fit
- Polycarbonate frame and temple with sponge
- Ultra Lightweight
- Ergonomic Design
- Anti-Scratch

STANDARDS ANSI Z87.1, CE EN 166F



SG 922-CLEAR



- Clear/ Grey Lens
- Lightweight for an all day comfortable fit
- Polycarbonate frame and temple with sponge
- Ultra Lightweight
- Ergonomic Design
- Anti-Scratch

STANDARDS ANSI Z87.1, CE EN 166F



SG 916-CLEAR/ GREY



- Clear/ Grey Lens
- Lightweight for an all day comfortable fit
- Polycarbonate frame and temple
- Ultra Lightweight
- Ergonomic Design

STANDARDS ANSI Z87.1, CE EN 166F



SG 918-CLEAR/ GREY



- Clear/ Grey Lens
- Lightweight for an all day comfortable fit
- Polycarbonate frame and temple
- Ultra Lightweight
- Ergonomic Design
- Anti-Scratch

STANDARDS ANSI Z87.1, CE EN 166F



HEARING PROTECTION



HEARING PROTECTION

Rigman hearing protection is designed to give users the unsurpassed comfort and ease of use that contributes toward increased compliance and a happier workforce.

We provide hearing protection devices that best suits for all industrial applications and complies with international standards.



EAR MUFF- MAXFIT (MODEL RIG023)

Maxfit offers a comfortable fit and most of them can be worn in three positions.

- ✦ Slotted type ear muff
- ✦ Light weight
- ✦ Soft PVC cushions for comfort during prolonged usage
- ✦ SNR: 23db

STANDARDS ANSI S12.42,
CE EN 352-3:2002

INDUSTRIAL APPLICATION

Civil Construction, Fabrication, Oil & Gas,
Marine, Mechanical Construction and Manufacturing





◀ **EARMUFF RMSE 1350**



Head band strap and foam-filled cushion-padded earmuff fit securely and comfortable over the ear.


- Lightweight plastic head band
- Soft PVC cushions for comfort during prolonged usage
- Molded grips make fitting easy and quick
- Can be worn over-the-head, behind-the-neck, or under-the-chin

STANDARDS CE EN 352-1 ANSI S12.42

◀ **METAL DETECTABLE FOAM CORDED EARPLUG (B)**

- Metal detectable for both earplug and cord
- Soft & comfortable
- Low pressure inside of ears
- Designed to fit most of ear canals
- Non irritating

STANDARDS EN 352-2:2002
ANSI S3.19

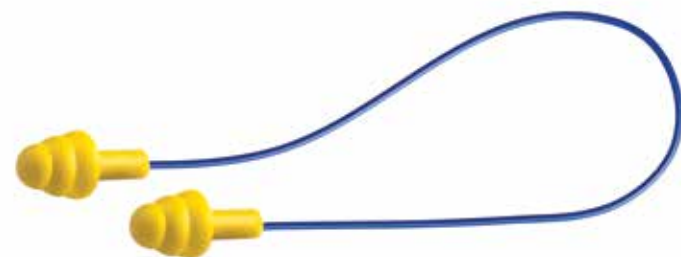

◀ **EAR PLUG WITH CORD REP300C SNR35DB**

- PU Foam
- SNR 35dB
- Disposable corded earplug in polybag
- Non-irritating and shaped to fit

STANDARDS EN 352-2:2002
ANSI S3.19, CE

Packing 100 Pcs / Pkt

◀ **EAR PLUG WITHOUT CORD REP300**



- PU Foam
- SNR 35dB
- Disposable corded earplug in polybag
- Non-irritating and shaped to fit

STANDARDS EN 352-2:2002
ANSI S3.19, CE

Packing 200 Pcs / Pkt



**TURN KNOB
CLOCKWISE
TO DISPENSE
UNCORDED
EAR PLUGS**

◀ **EAR PLUG DISPENSER**

Convenient, quick access and easy to use leads to higher compliance, plus because the workers take one pair at a time there is no wasteful grabbing of multiple pairs or pocket fill ups that end up getting trashed without being used. Less waste means cost saving.

Packing - 300
Ear Plugs in each dispenser

RESPIRATORY PROTECTION

RESPIRATORY PROTECTION

RIGMAN disposable respirators keep users safe from particulate contaminations with its advanced filter and are one of the best-selling respirators in the market. The electrostatic filter absorbs every tiny particle that passes through and enhances the breathability with bigger voids between filter reducing the resistance to flow of air. The respirators comply with international standards such as NIOSH and EN.

- ☞ LOW BREATHING RESISTANCE
- ☞ EXHALATION VALVES
- ☞ ELECTROSTATIC FIBERS
- ☞ OPTIMUM FILTERING EFFICIENCY
- ☞ NIOSH & EN149: 2001
- ☞ STANDARD: N95 & EN 149:2001 + A1:2009

APPLICATIONS

Process industries, fabrication yards, construction and infrastructure, marine industries, mining industries, paper industries, cement industries, manufacturing sectors.





N95

MASK R81CN9510

- ☞ N95 Cup shape particulate
- ☞ Designed with comfortable and non-allergic electro statically charges fibers
- ☞ Adjustable aluminum nose clip
- ☞ Headband-Latex free synthetic rubber

STANDARDS NIOSH, N95

Packing: 20 Pcs / Pkt



FFP2

MASK FL2V11

- ☞ Particulate respirator flat-FOLDABLE TYPE WITH VALVE
- ☞ Designed with comfortable and non-allergic electro statically charges fibers
- ☞ Adjustable aluminum nose clip
- ☞ Headband-Latex free synthetic rubber

STANDARDS EN 149: 2001, AI 2009, CE 0194, FFP2 NR

Packing: 12 Pcs / Pkt



N95

MASK R81FN95

- ☞ N95 Particulate respirator-FOLDABLE TYPE
- ☞ Designed with comfortable and non-allergic electro statically charges fibers
- ☞ Adjustable aluminum nose clip
- ☞ Headband- Latex free synthetic rubber

STANDARDS NIOSH, N95

Packing: 52 Pcs / Pkt



FFP3

MASK CP3V11

- ☞ Cup-shape particulate respirator with valve
- ☞ Designed with comfortable and non-allergic electro statically charges fibers
- ☞ Adjustable aluminum nose clip
- ☞ Headband-Latex free synthetic rubber

STANDARDS EN 149: 2001, AI 2009, CE 0194, FFP3 NR

Packing: 10 Pcs / Pkt



FFP3

MASK CP3V33

- ☞ Cup-shape particulate welding respirator with valve
- ☞ Designed with comfortable and non-allergic electro statically charges fibers
- ☞ Headband-Latex free synthetic rubber

STANDARDS FFP3 NR/ EN149:2001, +A2009-1

Packing: 12 Pcs / Pkt



FFP3

MASK CP2V11

- ☞ Cup-shape particulate respirator with valve
- ☞ Designed with comfortable and non-allergic electro statically charges fibers
- ☞ Adjustable aluminum nose clip
- ☞ Headband-Latex free synthetic rubber

STANDARDS EN 149: 2001, AI 2009, CE 0194, FFP2 NR

Packing: 10 Pcs / Pkt

HAND PROTECTION



HAND PROTECTION

IMPACT GLOVES

Impact protection gloves help to reduce the risk of back of the hand impact and abrasion injury. Enabling 360° protection to hands from abrasion, impact, vibration, cut and heat in diversified activities. The unique features of cut - resistant, anti - vibration and impact resistance in combination provide one solution for all needs. Flexible synthetic composite lining , light in weight, washable, comfortable due to its material texture and breathability and durable. All gloves are certified and in compliance with EN 388.



INDUSTRIAL APPLICATION

Civil, Heavy Construction, Fabrication, Oil & Gas, Marine,
Mechanical Construction, Manufacturing, Extraction & Refining



RIG5 IMPACT GLOVES



100 Pairs

- Thermo Plastic Rubber (TPR) backing helps reduce back-of-hand injuries
- Excellent oil grip and bare-hand feel
Fine-gauge, 100% nylon
- Dyneema seamless-knit shell is used as lining for cut resistance



STANDARDS CE, EN388



WORKING GLOVES 555 (10.5'')



100 Pairs



- Red cow split leather gloves
- Reinforced Double Palm
- Rubberized Cuff
- Red Cotton Back, Half Lining, A/B Grade

STANDARDS CE, EN388



RIG10-IMPACT GLOVES



50 Pairs

- Thermo Plastic Rubber (TPR) backing helps reduce back-of-hand injuries
- Excellent oil grip and bare-hand feel
Fine-gauge, 100% nylon
- Seamless-knit shell is non-linting and breathable
- Kevlar blended palm for a rugged and durable grip

STANDARDS CE, EN388



WORKING GLOVES 777 (10.5'')



100 Pairs



PATCH PALM

- Red cow split leather gloves
- Reinforced single patch Palm
- Rubberized Cuff
- Red Cotton back, Half Lining, A/B Grade

STANDARDS CE, EN388



RIG-7 IMPACT GLOVES



50 Pairs

- Synthetic leather palm, durable and long lasting
- PVC anti-slip palm patches and double with neoprene padding on fingers and top hand
- Neoprene Knuckle / High Visibility Orange and Yellow
- Shock absorbing thermoplastic rubber on back of hand and fingers
- Kevlar lining provides cut and abrasion resistance

STANDARDS CE, EN388



OR100-IMPACT GLOVES



100 Pairs

- Ergonomic EVA stripe design on back protects hands from vibration & offers better flexibility
- Reflective accents and high-visibility color scheme for optimal hand visibility
- TPR patch on fingers for impact protection, Pinch injury prevention & blow deflection
- Anti-slip pure rubber padding on palm performs much better on anti-cut & anti-abrasion than common PVC
- Resists oil and enhances grip

STANDARDS CE, EN388



WELDERS GLOVES RG-02 (16")



- Cow Split leather
- Green colour with golden brown patch
- Size: 16"

STANDARDS CE, EN 12477:2001
+AI:2005, EN 388:2003, EN 407:2004
EN 12477, CAT II



DRIVERS GLOVES RM-DG



- Easy to use with frill and elastic
- Size: 10"

STANDARDS CE, EN388:2003,
EN 407, EN12477



DOTTED GLOVES DOUBLE SIDED 003 (10")



- Cotton Knitted Gloves with PVC Dots on the Palm & Fingers (Double side)
- Navy Blue Nylon textured on the outer surface and cotton on the inside for better comfort
- The PVC dots provide additional support in gripping various surfaces

STANDARDS EN388



GLOVES RNT2309 NITRILE COATED



- The nitrile palm coating provides excellent grip to oil and grease applications and longer life
- Seamless construction provides superior comfort and lessens hand fatigue
- The ambidextrous design and nitrile coating on both sides give the wearer four sides of maximum value
- Cotton fleece lining for additional comfort

STANDARDS CE, EN 388:2003



GLOVES RIG 1220



- Gants

STANDARDS CE, EN 388: 2003



MECHANICAL GLOVES RIG 1423



- Gants

STANDARDS EN388:2003



PVC CHEMICAL GLOVES RIG 1417



- Gants anti acide en PVC

STANDARDS CAT III EN 374,
EN 4131) 388)

BODY PROTECTION - WORKWEAR





RIGMAN DENIM WORKWEAR

RIGMAN DENIM JEANS

- Heavyweight 100% cotton denim
- Zipper fly
- Triple needle stitching for strength and durability
- Reinforced hip pockets for longer wear

STANDARDS EN 13688: 2013

Size: 28-38

Packing: 20 Pcs/ Ctn



RIGMAN DENIM JACKETS

Rigman Denim Jacket features pure premium heavy weight denim and traditional styling which includes: tailored collar, front and back yokes.

STANDARDS EN 13688: 2013

Size: S - 5XL

Packing: 20 Pcs/ Ctn



COVERALL CT 190

Composition: 100% Cotton
Weight: 190 Gsm

STANDARDS BS EN ISO
13688:2013 & EN 340:2003

Size: S-6XL

Packing: 25 Pcs/ Ctn



COVERALL CT 205

Composition: 100% Cotton
Weight: 205 Gsm

STANDARDS BS EN ISO
13688:2013 & EN 340:2003

Size: S-6XL

Packing: 20 Pcs/ Ctn



ART NO. JC-1



ART NO. CC-1

DUST CAP / BALACAVA

Rigman 100% cotton and jeans welding caps are used for superior under-helmet head protection while welding. Made of superior quality denim fabric and cotton fabric can be also used during windy and dusty condition.



COVERALL, CT270 DELUXE COTTON

- 100% cotton texture for easy cleaning
- Fully mercerized & preshrunk
- Is durable washing and dry cleaning
- Action back allowing maximum body movement
- Side elastics with tunnel waistband
- Reinforced stress points
- Action back allowing maximum body movement
- Color fastness & easy care
- 270 gsm

STANDARDS EN ISO :13688
2013 & EN 340:2003

Size: S-6XL

Packing: 20 Pcs/ Ctn



HIGH VIZ T- SHIRT HVT-2

T-shirt High Visibility,
100% Polyester



DISPOSABLE COVERALL RIGC342G

Weight: 40 Gsm
Chemical Type / Basic Type

STANDARDS CE, TYPE 4,
TYPE 5, TYPE 6

Size: S-6XL

Packing: 50 Pcs/ Ctn

TEFLON COATED COVERALL RCTTF 220

Cotton Stain-Repellent Coverall

100% comfort cotton 220GSM thick fabric,
Teflon coated coverall with stain repellency
treatment. Pre shrunk fabric for durability
with 50mm retro-reflective tape. Industrial
washing 60-75°C.

100% cotton-poifs 260gmd', finition teflon,
tissue prelate anti taches pour plus de
durabilité avec des bandes réfléchissantes de
50mm- Lavage a la machine temp 60-75°C

STANDARDS EN ISO :13688
2013 & EN 340:2003

Size: S-6XL

Packing: 20 Pcs/ Ctn





PRO PREMIUM COVERALL CT240

Composition: 100% Cotton
Weight: 240 Gsm
Size: S-6XL

STANDARDS BS EN ISO 13688 :
2013 EN 340 : 2003

Packing : 20 Pcs / Ctn



HIGH VIZ COTTON COVERALL HCT270

Composition: 100% Cotton
Weight: 270 Gsm
Packing: 20 Pcs/ Ctn

STANDARDS EN ISO 13688:
2013 & EN 340: 2003

Packing : 20 Pcs / Ctn



COVERALL PS240 C

Composition: 40% polyester, 60% Cotton
Composition: 100% Cotton
Weight: 250 Gsm
Packing: 20 Pcs/ Ctn

STANDARDS EN ISO 13688:2013

Packing : 20 Pcs / Ctn



BIB COVERALL BCT240

Composition: 100% Cotton
Weight: 240 Gsm

STANDARDS EN ISO 13688:2013

Packing : 20 Pcs / Ctn



PANT & SHIRT PS240 PC

Composition: 40% polyester, 60% Cotton
Composition: 100% Cotton
Weight: 250 Gsm

STANDARDS EN ISO 13688:2013

Packing : 15 Set / Ctn



**Reflective
tape in
high-configuration**

HIGH VIZ COTTON PANT & SHIRT PL8020

Composition: Pre-shrunk 100% Cotton drill
Weight: 240 Gsm

STANDARDS EN ISO 13688:
2013 & EN 340: 2003

Packing : 20 Pcs / Ctn

 FOOT PROTECTION





PROSERIES 6500

UPPER : Water repellent cow nubuck honey leather with anti-t abrasion protection. 18 KV Electric resistance. Padded tongue with ergonomic collar.

LINING : Moisture wicking Air Mesh

TOE CAP : 100% composite toe cap, 200J, Lightweight

FOOTBED : Comfort Anatomic, Antibacterial, shock absorber in the heel area

MIDSOLE : 100% composite midsole, 1100Kn, Anti penetration, Anti Static and Lightweight

OUTSOLE : Insulated with PU/Rubber construction
Size: 37 - 47

STANDARDS EN ISO 20345: 2011, SEP
WRU EI SRC HRO ASTM F2413-11

PROSERIES R1021/6" BLACK

UPPER : Water repellent full grain leather. Padded tongue and ergonomic collar

LINING : DINTEX waterproof lining

TOE CAP : 100% composite toe cap, 200J, Lightweight

FOOTBED : Comfort Anatomic, antibacterial, shock absorber in the heel area

MIDSOLE : 100% composite midsole, 1100KN, Anti-penetration, anti-Static and lightweight

OUTSOLE : Scuff toe cap, PU / RUBBER contact heat resistant up to 300° C HRO

SIZE : 37 to 47

STANDARDS EN ISO 20345 S3
WR HRO SRC ASTM F2413 - 11



R6106

UPPER : Nubuck water repellent leather and abrasion resistant

LINING : Cambrella material

TOE CAP : Composite 200J lightweight

FOOTBED : Anatomic, Antibacterial, shock absorber in the heel area

MIDSOLE : 100% composite midsole, 1100KN, Anti-penetration, anti-Static and lightweight

OUTSOLE : PU dual density injection, Slip-resistant

SIZE : 37-47

STANDARDS EN ISO 20345:2001 CE
S3 SRC ASTM F2413-11

PROSERIES HIKER 526

UPPER : Water-repellent full grain cow leather with anti-abrasion toe protection padded tongue and ergonomic collar. Additional TPU Heel Protection

LINING : Air Mesh

TOE CAP : 100% composite toe cap, 200J, Lightweight

FOOTBED : Comfort Anatomic, Antibacterial, shock absorber in the heel area

MIDSOLE : 100% composite midsole, 1100KN, Anti-penetration, anti-Static and lightweight

OUTSOLE : PU / RUBBER construction

SIZE : 37 to 47

STANDARDS EN ISO 20345: 2001 CE
S3 WRU SRC HRO ASTM F2413-11

PROSERIES R1021/6" BROWN

UPPER : Water repellent Full grain leather. Padded tongue and ergonomic collar

LINING : DINTEX waterproof lining

TOE CAP : 100% composite toe cap, 200J, Lightweight

FOOTBED : Comfort Anatomic, Antibacterial, shock absorber in the heel area

MIDSOLE : 100% composite midsole, 1100KN, Anti-penetration, anti-Static and lightweight

OUTSOLE : Scuff toe cap, PU / RUBBER contact heat resistant up to 300° C HRO

SIZE : 37 to 47

STANDARDS EN ISO 20345 S3
WR HRO SRC ASTM F2413 - 11



FOOT PROTECTION



R16S3

UPPER : Black split buffalo leather
LINING : Mesh
TOE CAP : EN Steel Toe Cap
FOOTBED : Non-woven fabric
MIDSOLE : PU
OUTSOLE : PU

STANDARDS EN ISO 20345:2011 CE S3 SRC WRU
 ASTM F2413-11



SENATOR 511

UPPER : Suede Leather
LINING : Cambrella
TOE CAP : EN Steel Toe Cap
FOOTBED : Non-woven fabric
OUTSOLE : PU

STANDARDS EN ISO 20345:2011 CE S1 P SRC
 ASTM F2413-11



SENIOR UE413

UPPER : Suede Leather
LINING : Mesh
TOE CAP : EN Steel Toe Cap
FOOTBED : Non-woven fabric
OUTSOLE : PU

STANDARDS EN ISO 20345:2011 CE S1 P
 ASTM F2413-11



8061 BOOT

UPPER : Oil and water repellent waxy full grain leather and anti-abrasion protection. Additional TPU Heel Protection, dark brown cow leather, water resistant

LINING : Cambrella material

TOE CAP : Composite toe cap 200J

FOOTBED : Comfort Anatomic, Antibacterial, shock absorber in the heel area

MIDSOLE : 100% composite midsole, 1100KN, Anti penetration, anti Static and lightweight

OUTSOLE : PU/RUBBER contact heat resistant upto 300C HRO

SIZE : 37 to 47

STANDARDS EN ISO 20345:2011 CE
 S3 WRU SRC HRO ASTM F2413-11



ROCKER LOW CUT-700 & HIGH CUT-UF-2

UPPER : Genuine leather, 1.6mm to 1.8mm thick, anti-abrasion

LINING : Comfort Cambrella lining

TOE CAP : 200J Lightweight steel

FOOTBED : Comfort Anatomic, Antibacterial, shock absorber in the heel area

MIDSOLE : Steel plate 1100KN, Anti-penetration

OUTSOLE : PU/PU Slip-resistant

SIZE : 37 to 48

STANDARDS EN ISO 20345:2011 CE S1 P SRC
 ASTM F2413-11



◀ **6104**

UPPER : Cow leather
LINING : Sandwich Mesh
TOE CAP : Steel Toe
FOOTBED : PU Insole 7Mm
MIDSOLE : Steel Plate
OUTSOLE : PU/Rubber

STANDARDS CE EN ISO 20345 SIP SRC



◀ **J6002**

UPPER : Action Nubuck Leather
LINING : Sandwich Mesh
TOE CAP : Composite Toe
FOOTBED : PU Insole 7Mm
MIDSOLE : Kevlar Midsole
OUTSOLE : PU/Rubber

STANDARDS EN ISO 20345:2011 CE
 S3 WRU SRC HRO ASTM F2413-17



◀ **1051 EXECUTIVE - OXFORD**

UPPER : Top grade soft smoothmicrofiber leather
LINING : PU Leather
TOE CAP : Plastic Toe
FOOTBED : PU And Eva
MIDSOLE : Kevlar Midsole
OUTSOLE : PU

STANDARDS EN ISO 20345:2011 CE S3 WRU SRC
 ASTM F2413-17



◀ **6504**

UPPER : Waterproof black full grain nubuck thickness 2.0-2.2mm
LINING : Cool Max
TOE CAP : Composite Toe
FOOTBED : Air Mesh+PU
MIDSOLE : Kevlar Midsole
OUTSOLE : PU and Rubber Desma Injection

STANDARDS CE EN ISO S3 SRC HRO



RIGGER PULL ON BOOTS-329T BROWN

- UPPER** : Water repellent waxy full grain leather and anti-abrasion protection.
brown cow leather, water resistant
- LINING** : Cambrella material
- TOE CAP** : 200J, Lightweight
- FOOTBED** : Comfort Anatomic, Antibacterial, shock absorber in the heel area
- MIDSOLE** : Metal midsole, 1100KN, Anti penetration, anti Static and light weight
- OUTSOLE** : PU / RUBBER / TPU Outsole, Slip-tresistance

STANDARDS EN ISO 20345 S3 SRC WRU HRO



RIGGER PULL ON BOOTS -329T BLACK

- UPPER** : Water-repellent waxy full grain leather and anti-abrasion protection.
Black cow leather, Water resistant
- LINING** : Cambrella material
- TOE CAP** : 200J, Light weight
- FOOTBED** : Comfort Anatomic, atntibacterial, shock absorber in the heel area
- MIDSOLE** : Metal midsole, 1100KN, Anti penetration, anti Static and light weight
- OUTSOLE** : PU / RUBBER / TPU Outsole, Slip-resistance

STANDARDS EN ISO 20345 S3 SRC WRU HRO



609

- Oil and water-repellent waxy full grain leather and anti-abrasion protection.
- Padded tongue and ergonomic collar. Additional TPU Heel Protection.
- Comfort footwear membrane.
- 100% composite toe cap, 200J, Light weight.
- Comfort Anatomic, antibacterial, shock absorber in the heel area.
- 100% composite (Fiber glass) midsole, Anti-penetration and lightweight.
- Scuff toe cap, PU / PU SRC construction.

STANDARDS EN ISO 20345:2011 S3 SRC WRU HRO



1178

- Water-repellent leather. Padded tongue and ergonomic collar. Waterproof lining.
- 100% composite toe cap, 200J, Light weight. Comfort Anatomic, Antibacterial, shock absorber in the heel area.
- 100% composite (Fiber glass) 1100KN, Anti-penetration and lightweight. Scuff toe cap, PU / RUBBER contact heat resistant up to 300° C HRO.

STANDARDS EN ISO 20345:2011 S3 SRC WRU HRO



R8852

- Ratchet Lacing Lacet
à crémaillère
- Action leather. Padded tongue and ergonomic collar.
 - 100% composite toe cap, 200J, Lightweight.
 - Comfort Anatomic, antibacterial, shock absorber in the heel area.
 - 100% composite (Fiber glass) 1100KN, Anti-tpenetration and lightweight.
 - Scuff toe cap, PU / RUBBER contact heat resistant up to 300° C HRO.
 - Ratchet Lacing for quick fix and removal

STANDARDS EN ISO 345 S3 CI SRC WRU



PVC GUM BOOT

- PVC Gum Boots, 37.5cm height, Black color, RIGMAN, S5 SRC
- Slip Resistant, Acid Resistant, Oil resistant – outsole.
- PVC upper material
- midsole: steel plate, steel toe
- Size: 37 - 47

STANDARDS CE EN ISO 20345:2011 S5 SRC WRU

FALL PROTECTION

WEBBING RETRACTORS

Device is designed for works which require large dislocation from the anchorage point. Energy absorber integrated with the work webbing.



RM AH 210

Retractable type fall arrester ROLEX 1 [AH 210] is a component of personal protective equipment against fall from the height. Fall arresters with webbing retractor. Shock resistant Radilon cover.

Maximal length of the device is 2.25 m.

PARAMETERS

Cover plastic Radilon
Webbing polyamide 50 mm Mechanism galvanized steel Equipment snap hook AZ002AS

Number of person: 1
Max. total weight of the user: 140 kg

WORKING LENGTH: max. 2.25 m

DIMENSIONS: 96 x 98 x 320 mm

WEIGHT: 1.18 kg

STANDARD EN 360 - 2002

ART NO. AH 210

RM AH 220S

Retractable type fall arrester ROLEX 3 [AH 220S] is a component of personal protective equipment against fall from the height. Fall arresters with webbing retractor. Shock resistant Radilon cover.

Maximal length of the device is 2.25 m.

PARAMETERS

Cover plastic Radilon
Webbing polyamide 50 mm Mechanism galvanized steel Equipment snap hook AZ002AS,

Number of person: 1
Max. total weight of the user: 140 kg


WORKING LENGTH: max. 2.25 m

DIMENSIONS: 96 x 98 x 320 mm

WEIGHT: 1.68 kg

STANDARD EN 360 - 2002

ART NO. AH 220S

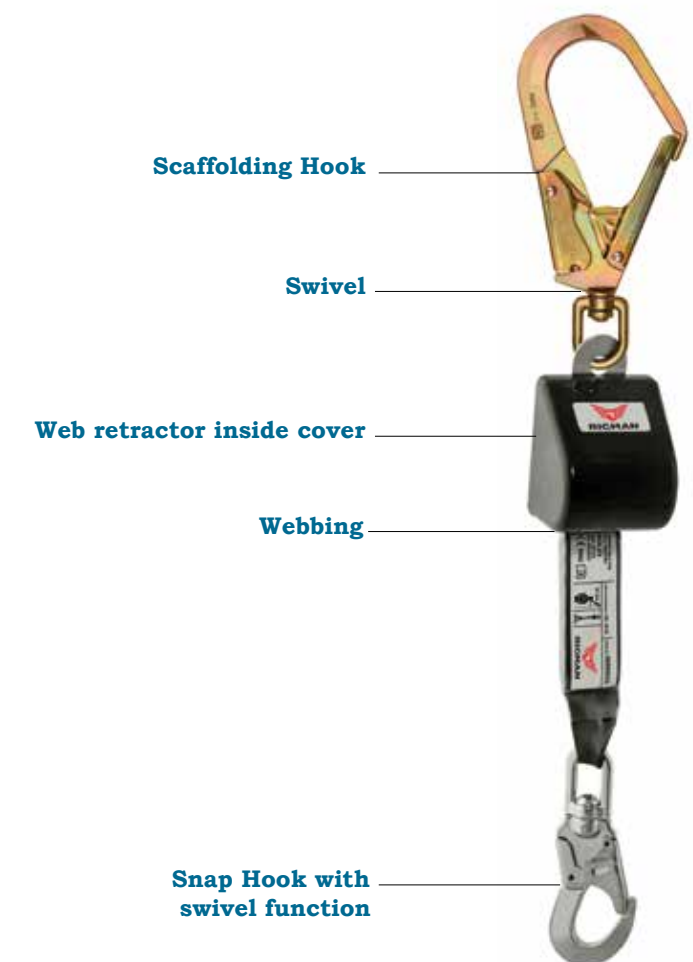

STEEL CABLE RETRACTOR



RM CR 240

- Built-in brake with energy
- Dissipating mechanism inside
- Durable plastic housing


STANDARD: EN 360 CE

PARAMETERS

Static strength: not less than 12 kN
Braking force: less than 6 kN
Fall arresting distance: less than 2m

MODEL NO.	LMax/Mtr	Weight/Kg
RM CR 240-06	6 M	4.10Kg LOWEST ON THE MARKET
RM CR 240-10	10M	7.9
RM CR 240-15	15M	8.3

ART NO. CR 240

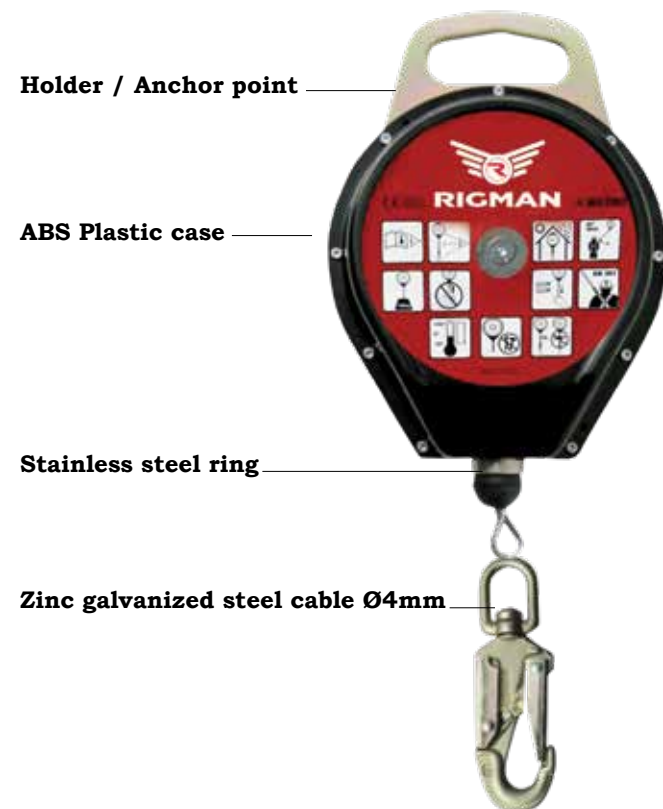

ART NO. CR 200

MODEL NO.	LMax/Mtr	Weight/Kg
RM CR 200-06	06 M	5.1
RM CR 200-10	10 M	5.3
RM CR 200-15	15 M	6.1

STANDARD: EN 360 CE

ART NO. CR 300

RM AZ 060

Galvanized steel
Opening : 21mm
Weight : 380g

MODEL NO.	LMax/Mtr	Weight/Kg
RM CR 300-20	20 M	7.5
RM CR 300-25	25M	7.9
RM CR 300-28	28M	8.3

STANDARD: EN 360 CE

FALL PROTECTION



RM - CRW 300

- Housing is made of high-strength aluminum alloy.
- The device has galvanized steel cable.
- CRW-300 has a manual winch with lifting and lowering function.
- It can be used alone or with Tripod TM9

Model NO.	Max. Cable Length	Weight/ KG	Max. Working Load
RM-CRW300	25M	8.5 Kg	100 Kg

STANDARDS EN 360: 2002



RESCUE AND EVACUATION



RIGMAN FULL BODY SAFETY HARNESS

MODEL – RMP 100+ R200

RIGMAN RMP100 full body safety harness enhances the level of safety to the maximum and provides comfort to the wearer working at heights.

Salient features:

- Secure fit ensuring safety and comfort
- Retro-reflective strip/strands and hi-visibility material for better visibility even in low illumination areas. 24/7
- 7 point harness designed for increasing safety, comfort and suit different body contours.
- A Shape rear reinforcement for secure fit to avoid slippage.
- Light weight high strength forged aluminium dorsal D – Ring.
- Muddle free design

Description

7 Points Adjustment | Rear Anchorage Point (forged dorsal ring with smooth finish) | Adjustable Shoulder and Thigh Straps with flat buckles Reflective Tape on shoulders | Reflector Webbing Yarn | Webbing width – 45mm | Breaking strength 5000 lbs | High visibility color



**STANDARD : CERTIFIED AS
PER EN 361:2002 WITH SERIAL
NUMBER TRACEABILITY ON
THE LABEL.**

MODEL – R200

RIGMAN Shock Absorber with double webbing lanyard with 2 Rebar hooks and 1 Karabiner 25Kn.

Salient features:

- Double webbing lanyard: High-visibility with retro-reflective thread across full body which makes it visibly discernible in dawn and dusky working conditions.
- Shock absorber: R200 shock absorber regulates deceleration when the end of rope is reached on free fall. (Refer to instruction manual)
- Connectors: 2 units of Rebar, 1 unit of Carabiner with 25KN rated capacity.
- Length of lanyard: 2 Mtr. from one end connector eye to the other, width: 30mm
- Material: 100% polyester webbing

Description

Shock Absorber lanyard 2 Mtr. | High visibility color | Webbing width 30mm | Two Scaffolding hooks | One Karabiner connector 100% Polyester

Confirms to EN361:2002, EN 355:2002, EN 354, and EN 362:2004




RESCUE AND EVACUATION



SAFETY HARNESS RMP 300-P + R250

- Harness with front and dorsal anchorage point
- Work positioning belt
- Separate regulation for legs and shoulder straps

STANDARD EN 361, EN 358

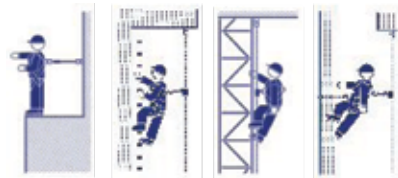

ART NO. RMP 300-P + R250



SAFETY HARNESS P70

- Harness with front and dorsal anchorage point
- Work positioning belt
- One regulation for legs and shoulders straps

Size: M-XL - 1660g, XXL - 1760g

STANDARD: EN 361, EN 358, EN813



ART NO. P70

SAFETY HARNESS P51E

- Harness with front and dorsal anchorage point
- Work positioning belt
- Separate regulation for legs and shoulders straps

Size: M-XL - 1880g, XXL - 1960g

STANDARD: EN 361, EN 358 CE

ART NO. P 51E



SAFETY HARNESS P80

- Harness with front and dorsal anchorage point
- Attaching point for sitting position
- Work positioning belt
- One regulation for legs and shoulders straps

Size: M-XL - 1720g, XXL - 1800g

STANDARD: EN 361, EN 358, EN813 CE



ART NO. P80



RM RUP-503

RESCUE LIFTING AND LOWERING DEVICE

RESCUE LIFTING DEVICE

RM RUP-502

RESCUE LIFTING AND LOWERING DEVICE:

- Automatic brake
- Weight: 14 kg
- Working load: 140 kg
- Breaking force: 1400 kg
- Rope length 25Mtr

STANDARD: EN 1496 class B (CE)

ART NO. RM RUP-502



ALUMINIUM HOLDER

STEEL GALVANIZED
CABLE Ø 6,3 MM



SAFETY TRIPOD RM TM-9

- Working load limit 500kg
- Breaking force: 22kN
- Version with chain
- Weight: 17.30kg - with chain

STANDARD EN 795 : B - 2012

ART NO. RM TM-9



HEAD

- Aluminium alloy



SHIPPING DIMENSIONS




We deliver tripod with chain.



RESCUE STRETCHER DX 018

Profile: 30x30mm steel zink plated or aluminium
Weight: 4.9kg

ART NO. DX 018

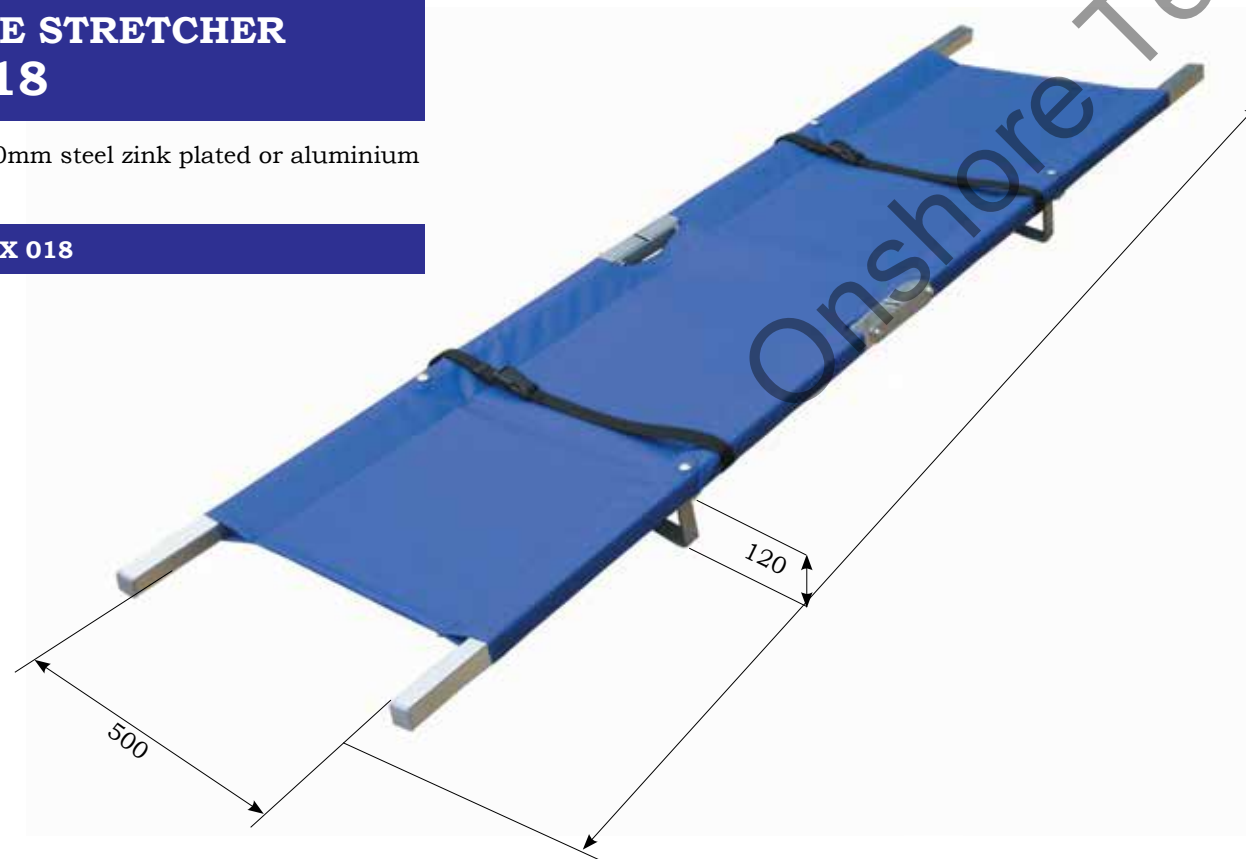

RESCUE LIFTING DEVICE RM AR 010


STANDARD: EN 341 class C 



ESCAPE KIT

- Descending device
- Working rope
- 3 Snap hooks
- Webbing sling
- Knife
- Transporting bag

KITS WITH ROPE: • 40m • 50m

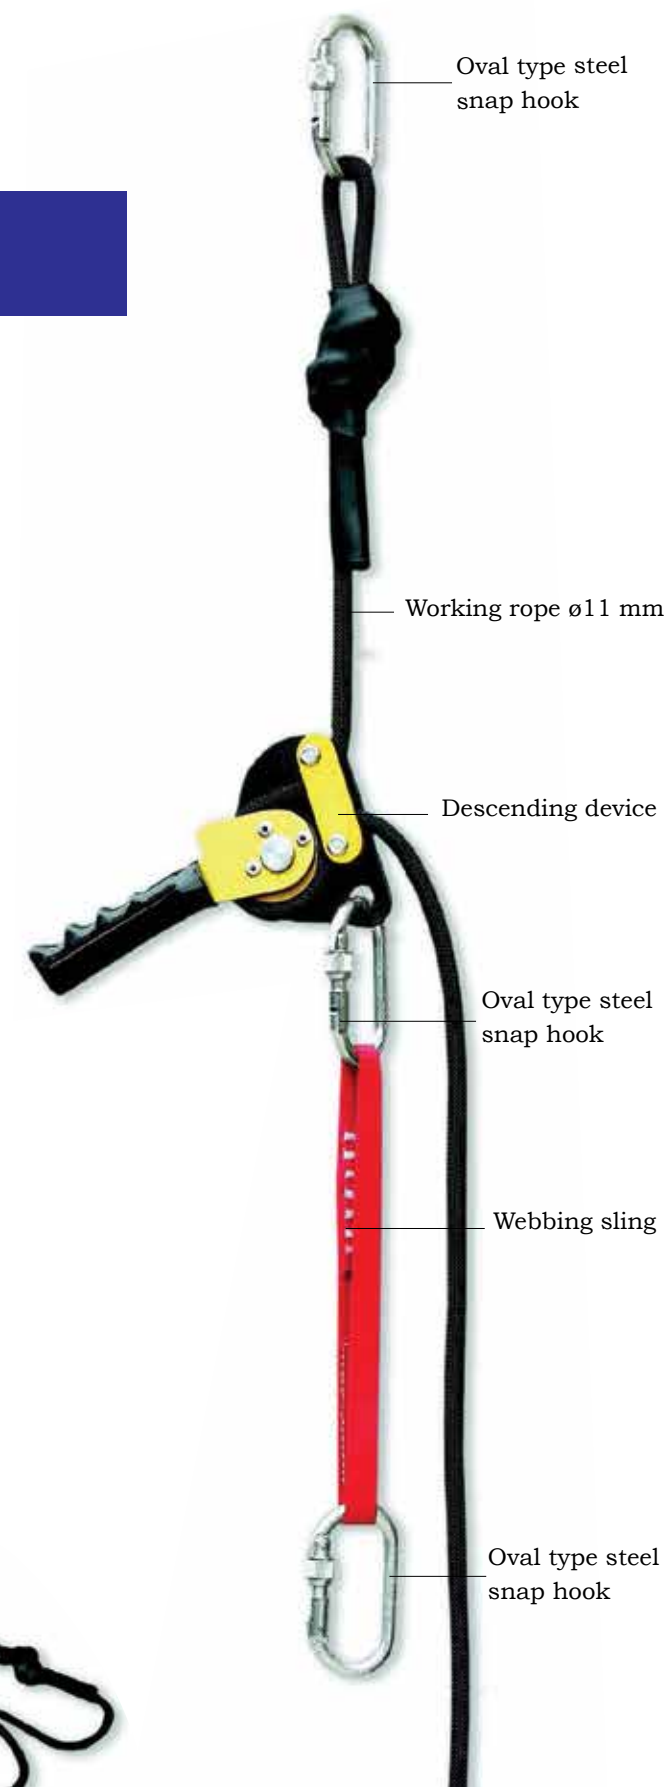



REFLECTIVE VEST

CLOTH TYPE

With 2" width silver high visibility reflective tape across the chest and over shoulders provides maximum visibility for safety. Lightweight and durable. Retains its colour under toughest weather. Fluorescent yellow or fluorescent red waistcoat. Good for construction workers, street workers, public utilities, policeman etc.

Colour: Fluorescent Yellow and Orange
Model with welcrow and zipper

Sizes: Free size

REFLECTIVE VEST

NET TYPE

Polyester mesh fabric with reflective tapes, high visible, lightweight and durable. Good for construction workers, public utilities and safety patrols etc.

Colour: Fluorescent Yellow and Orange

Sizes: Free size, Medium-4XL





Onshore Technical Supplies



RIGMAN

Rigman Safety Ltd
120 Baker Street, 3rd Floor, W1U 6TU
London, England

info@rigmansafety.com | www.rigmansafety.com

EDITION 2019 - 2020